

4BR

Snap-action Microswitches

Standard Metal

4BR

Characteristics	<ul style="list-style-type: none">■ Choice of IP54 or IP67 sealed versions■ Precise movements and exceptional repeat accuracy■ Robust metal housing
Rating	Up to 250 VAC, 15 A
Dimensions (mm)	53.1 × 20.6 × 29.2
Actuator	Plunger
Approvals	UL, CSA




Preferred Range

Ordering Reference	Actuating Force (N) (ozf)		Sealing	Operating pos. (mm) (in)		Terminal	Circuit	Actuator	Contacts	Electrical rating
4BR	7.2	26.00	IP54	39.3	1.550	Screw	CO	Plunger	Silver	Up to 250 VAC, 15 A
4BR510	7.2	26.00	IP67	39.3	1.550	Screw	CO	Plunger	Silver	Up to 250 VAC, 15 A


Specifications

Housing	Zinc based alloy
Base Plate	Phenolic
Plunger	Stainless steel
Cowl	Silicon rubber
Mechanism	Single pole change-over
Contacts	Silver
Terminals	Removable screw terminals, insulated cover plate
Temperature	-10°C to +85°C
Mechanical life	10 ⁶ cycles minimum (impact free actuation)
Protection	4BR/510 IP67 (NEMA type 6) except terminals / 4BR IP54 (NEMA type 4)
Mounting	Side mounting

Circuit diagram



Dimensions

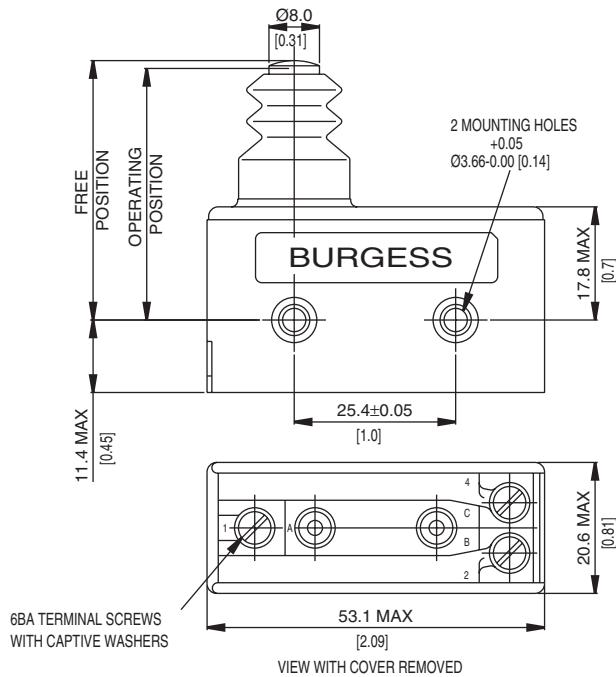


Recommended maximum electrical ratings

Voltage (max)	Resistive load (A)	Inductive load	Horsepower	Approval
250 VAC	15 (0.75 pf)	5	-	CSA 22.2 No. 55 - 6,000 operations
125 VAC	10 (0.75 pf)	-	-	CSA 22.2 No. 55 - 6,000 operations
250 VAC	-	-	¼ HP (0.45 pf)	CSA 22.2 No. 55 - 6,000 operations
125 VAC	-	-	¼ HP (0.45 pf)	CSA 22.2 No. 55 - 6,000 operations
0 - 15 VDC	10	-	-	General rating - 50,000 operations
15 - 30 VDC	5	-	-	General rating - 50,000 operations

4BR

Operating Characteristics

Actuator	Reference	Actuating Force		Release Force		Free Position		Operating Position		Movement Differential		Over travel	
		Maximum (N)	(ozf)	Minimum (N)	(ozf)	Maximum (mm)	(in)	(mm)	(in)	Maximum (mm)	(in)	(mm)	(in)
Plunger	4BR	7,2	26,00	1,7	6	40,8	1,6	39,3 ± 0,4	1,55 ± 0,016	0,08	0,003	4,6	0,18
	4BR/510	7,2	26,00	1,7	6	40,8	1,6	39,3 ± 0,4	1,55 ± 0,016	0,08	0,003	4,6	0,18



Ordering Reference

Type	4BR	
Environmental sealing	No digit	Mechanism sealed to IP54 (NEMA type 4)
	510	Mechanism sealed to IP67 (NEMA type 6)